


Cassini Curve Technical Data

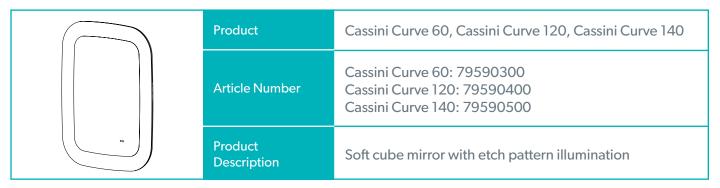

Technical Data	
Net weight (kg)	Cassini Curve 60: 6.9kg / Cassini Curve 120: 11.9kg / Cassini Curve 140: 13kg
Light Source	LED
Light Source Average Lifespan	30,000hrs - 50,000hrs
Total Rated Wattage (W)	Cassini Curve 60: 75W / Cassini Curve 120: 100W / Cassini Curve 140: 115W
Lumens (Lm)	Cassini Curve 60: 4440lm / Cassini Curve 120: 6840lm / Cassini Curve 140: 7800lm
Kelvins (k)	Cassini Curve 60/120/140: 2700-6500K
Is the mirror dimmable?	No
Energy Rating	F
Does the mirror require an earth connection?	No
Can I bypass the sensor so the mirror comes on with the main room light?	No
Colour temperature change (CTC) technology?	Yes
What IP rating is the mirror?	IP44 rated
What orientation can the mirror be hung in?	Portrait / Landscape
Is the heated pad only on when the miror is illuminated?	Yes
How long is the warranty?	5 years from date of purchase on silvering coating on mirror 2 years from date of purchase on electrical components in the mirror

Electrical Safety Information

HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician in accordance with current IEE regulations.

Ensure mains power supply is switched off before starting installation.

Before drilling, ensure there are no hidden cables or pipes in the wall.

HiB recommend you receive the product before commencing with installation as all sizes and measurements are approximate. HiB try and ensure all measurements are as accurate as possible.

In the interest of continuous product development, HiB reserves the right to alter specification as necessary. E & OE.